



SFN



Standard and Deluxe dough sheeter

Rolls and laminates any type of dough perfectly of minimum size, this machine rolls dough delicately and precisely.

Standard features

- Painted steel structural frame on casters and thermoformed ABS cover.
- Synthetic and polyurethane-coated conveyor belts. Stainless steel trays for dough collection and painted conveyor belt support frames.
- Laminating cylinders with 84 mm Ø and adjustable opening ranging from 0,2 up to 50 mm.
- Ergonomic, precise and thickness-adjustable handle of new generation with graduated double toothing scale.
- For “Deluxe” version the value set is shown on display.
- Easily removable polyethylene scrapers.
- Rolling-pin holder supports on both surface extremities, rolling-pins included as a standard supply.

- Conveyor belt working surfaces foldable upwards once production has ended in order to contain machine surface area.
- Reversal of conveyor belt direction with double controls, i.e. manual and through pedals.

Configurations

- Standard version, speed of delivery conveyor belt: 60 cm/sec.
- Deluxe version, with inverter - variable speed of delivery conveyor belt ranging from 12 up to 60 cm/sec., electronically adjustable and visualization of set thickness shown on display.

IMPORTANT NOTE: No cutting-roller supplied as a standard.

MODELS

Countertop SFN50-75	Countertop dough sheeter with conveyor belt dimensions: 500 x 750 mm. Cylinder Ø : 84 mm. Cylinder opening: 0,2-55 mm. Speed of delivery conveyor belt : 60 cm/sec.
Countertop SFN50-100	Countertop dough sheeter with conveyor belt dimensions: 500 x 1000 mm. Cylinder Ø : 84 mm. Cylinder opening: 0,2-55 mm. Speed of delivery conveyor belt : 60 cm/sec.
SFN50-75 std	Dough sheeter with conveyor belt dimensions: 500 x 750 mm. Cylinder Ø : 84 mm. Cylinder opening: 0,2-55 mm. Speed of delivery conveyor belt : 60 cm/sec.
SFN50-75 luxe	Dough sheeter with conveyor belt dimensions: 500 x 750 mm. Cylinder Ø : 84 mm. Cylinder opening: 0,2-55 mm. Speed of delivery conveyor belt : 12-60 cm/sec.
SFN50-100 std	Dough sheeter with conveyor belt dimensions: 500 x 1000 mm. Cylinder Ø : 84 mm. Cylinder opening: 0,2-55 mm. Speed of delivery conveyor belt : 60 cm/sec.
SFN50-100 luxe	Dough sheeter with conveyor belt dimensions: 500 x 1000 mm. Cylinder Ø : 84 mm. Cylinder opening: 0,2-55 mm. Speed of delivery conveyor belt : 12-60 cm/sec.
SFN50-120 std	Dough sheeter with conveyor belt dimensions: 500 x 1200 mm. Cylinder Ø : 84 mm. Cylinder opening: 0,2-55 mm. Speed of delivery conveyor belt : 60 cm/sec.
SFN50-120 luxe	Dough sheeter with conveyor belt dimensions: 500 x 1200 mm. Cylinder Ø : 84 mm. Cylinder opening: 0,2-55 mm. Speed of delivery conveyor belt : 12-60 cm/sec.
SFN60-100 std	Dough sheeter with conveyor belt dimensions: 600 x 1000 mm. Cylinder Ø : 84 mm. Cylinder opening: 0,2-55 mm. Speed of delivery conveyor belt : 60 cm/sec.
SFN60-100 luxe	Dough sheeter with conveyor belt dimensions: 600 x 1000 mm. Cylinder Ø : 84 mm. Cylinder opening: 0,2-55 mm. Speed of delivery conveyor belt : 12-60 cm/sec.



MODELS

SFN60-120 std	Dough sheeter with conveyor belt dimensions: 600 x 1200 mm. Cylinder Ø : 84 mm. Cylinder opening: 0,2-55 mm. Speed of delivery conveyor belt : 60 cm/sec.
SFN60-120 luxe	Dough sheeter with conveyor belt dimensions: 600 x 1200 mm. Cylinder Ø : 84 mm. Cylinder opening: 0,2-55 mm. Speed of delivery conveyor belt : 60 cm/sec.
SFN60-140 std	Dough sheeter with conveyor belt dimensions: 600 x 1400 mm. Cylinder Ø : 84 mm. Cylinder opening: 0,2-55 mm. Speed of delivery conveyor belt : 60 cm/sec.
SFN60-140 luxe	Dough sheeter with conveyor belt dimensions: 600 x 1400 mm. Cylinder Ø : 84 mm. Cylinder opening: 0,2-55 mm. Speed of delivery conveyor belt : 12-60 cm/sec.
SFN60-160 std	Dough sheeter with conveyor belt dimensions: 600 x 1600 mm. Cylinder Ø : 84 mm. Cylinder opening: 0,2-55 mm. Speed of delivery conveyor belt : 60 cm/sec.
SFN60-160 luxe	Dough sheeter with conveyor belt dimensions: 600 x 1600 mm. Cylinder Ø : 84 mm. Cylinder opening: 0,2-55 mm. Speed of delivery conveyor belt : 12-60 cm/sec.

Options

- Stainless steel structural frame.
- DRT - Device for application of cutting-rollers (rollers not included) (for SFN 60 140-160 “Deluxe” version only).
- For new machines departing from the factory.
- Cutting-rollers complete with discs and T/C–triangular, T/RO-round, T/RC–round with smooth and toothed edge, T/O-oval, T/Q-squared, T/RE - rectangular-shaped cutting figures.




Cutting device



Interchangeable rollers

ESEMPLI RULLI DI TAGLIO: TRIANGOLO (CROISSANT) /EXAMPLES OF CUTTING-ROLLERS: TRIANGLE – SHAPED (CROISSANT)

Base x altezza/Base x Height mm	Massa crudo/Raw mass g	N° tranci/No. of pieces
130x170	50-80	3
70x85	14-20	6
70x102	17-23	5
80x102	20-27	5
90x127	28-35	4
110x127	35-45	4
100x170	40-55	3
150x170	60-90	3
170x170	70-100	3




ESEMPLI RULLI DI TAGLIO: TONDO E OVALE/ EXAMPLES OF CUTTING-ROLLERS: ROUND AND OVAL

Diametro/Diameter mm	Massa crudo/Raw mass g	N° tranci/No. of pieces
100	30-50	5
60	Dec-20	9
80	22-30	7
120	50-70	5
140	65-85	4
100	30-50	5
180x90	50-80	5







ESEMPLI RULLI DI TAGLIO: QUADRO/ EXAMPLES OF CUTTING-ROLLERS: SQUARE-SHAPED

Lato/Side mm	Massa crudo/Raw mass g	N° tranci/No. of pieces
110x110	50-80	5
130x130	70-100	4
170x170	120-170	3












SFN Standard and Deluxe dough sheeter

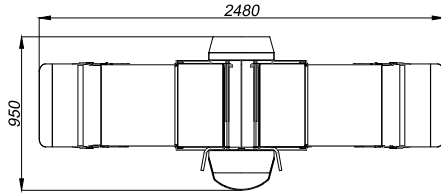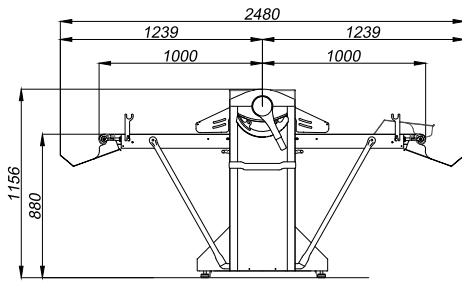

SFN50-100

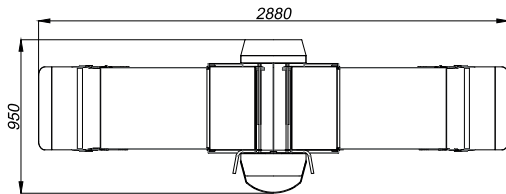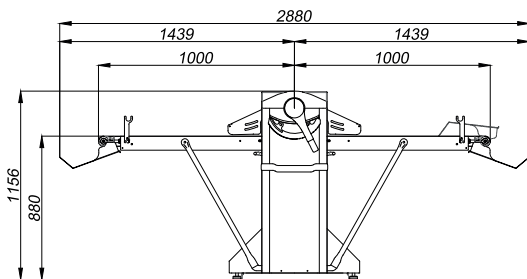





SFN50-120

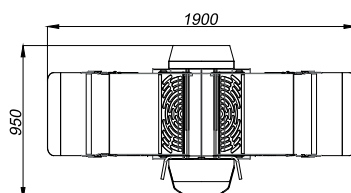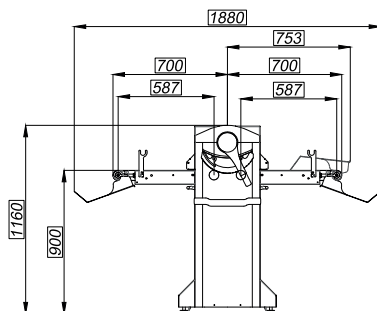





SFN50-75







SFN Standard and Deluxe dough sheeter

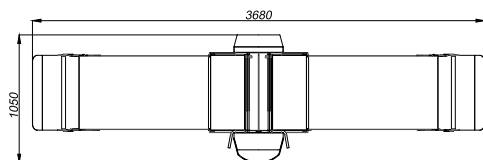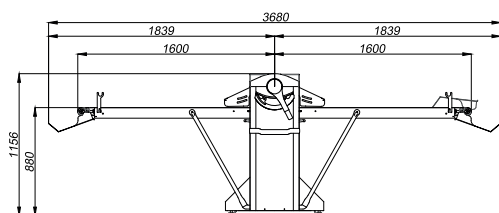




SFN60-160

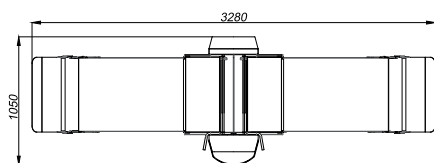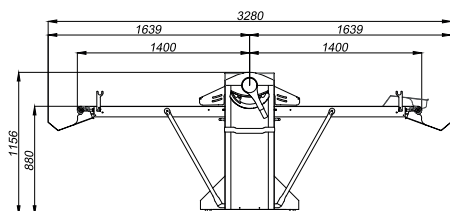

SFN60-140

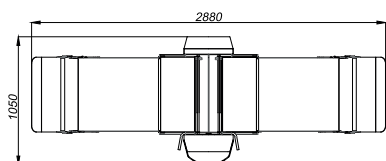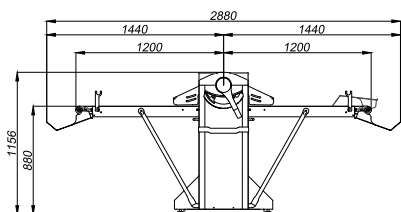


SFN60-120

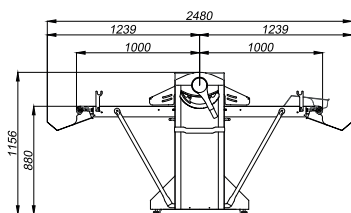


SFN60-100



SFN Standard and Deluxe dough sheeter

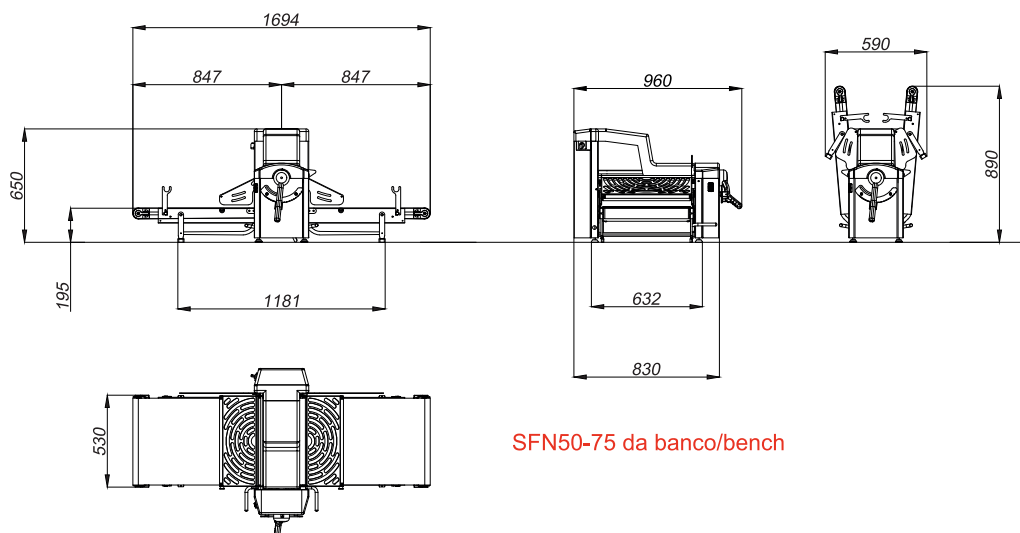

SFN50-75 da banco/bench

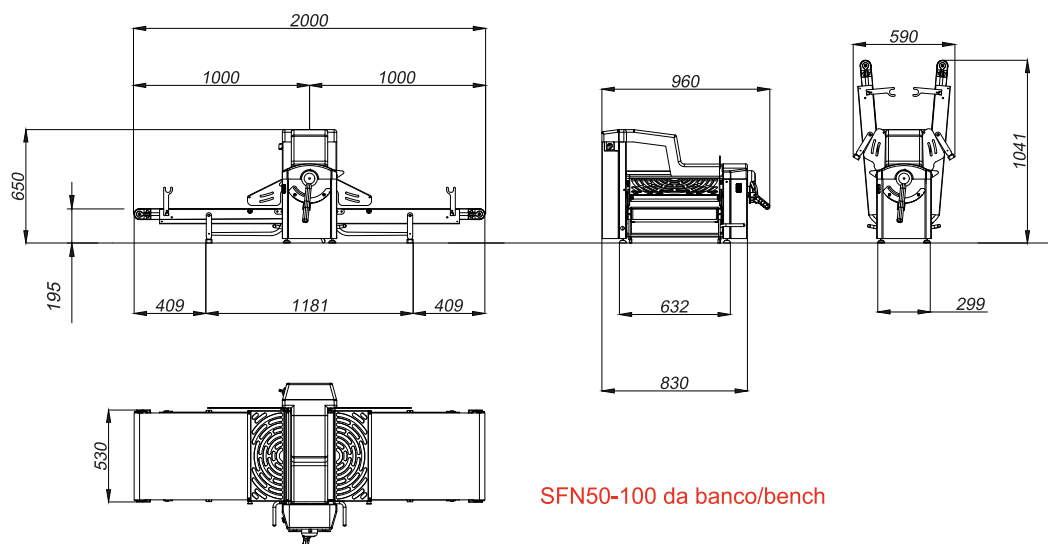

SFN50-100 da banco/bench

CARATTERISTICHE TECNICHE - DIMENSIONALI/ TECHNICAL FEATURES AND DIMENSIONS

MODELLI/MODELS	POTENZA ELETTRICA/ ELECTRIC POWER kW	MASSA/ MASS kg
SFN50-75 std banco/ Countertop std SFN50-75	0,55	130
SFN50-100 std banco Countertop std SFN50-100	0,55	135
SFN50-75	0,55	180
SFN50-100	0,55	190
SFN50-120	0,55	200
SFN60-100	0,75	220
SFN60-120	0,75	230
SFN60-140	0,75	240
SFN60-160	0,75	250

N.B.: Il modello versione Luxe (a velocità variabile), è dotato di inverter. /

IMPORTANT NOTE: Deluxe version model (variable speed), is equipped with inverter.