

EF-R 400x600 E/G



Rotating rack oven 400x600

EF-R is a rotating rack oven with gas or electric power designed for bakeries and pastry shops.

Capacity

- 1 rack for baking pans mm 400x600 with 8 or 10 or 12 levels.
- Non-removable swivel rack

Construction

- The baking chamber and the extrnal coating of the oven are made entirely of stainless steel type AISI 340
- The oven can be supplied individually or combined with the proofer with heating and humidification unit or with a support or trays holder.
- Extractor hood with motor included.
- The heat exchanger in refractory steel is designed and strengthened in order to obtain a total exploitation of the combustion allowing considerable energy savings.
- The rotation of the trolley inside the oven allows the air flow to reach the product completely during baking process, thus guaranteeing uniform baking.
- The trolley couplung type is fixed.
- The humidifier located inside the baking chamber is designed to guarantee an abundant supply of steam at each point of the trolley.
- The electric unit box is in compliance with the international standards and is designed to ensure easy use and control of the oven
- Stainless steel door with glass 12 mm thick and screen-printed outer glass.
- Control panel with digital thermostat and digital timer for baking time
- Steam generator
- Mounted on stainless steel electric cell or on open stainless steel support stand
- In the gas version, intake air atmospheric burner (rear access on the right)
- The high efficiency combustion chamber allows low operating consumption and considerable energy savings. Its structure favors an optimal exploitation of the heat exchange ensuring long lasting over time.

Configuration	E 4060	G 4060
Non-removable swivel rack	▪	▪
Removable swivel rack	□ €	□ €
Atmospheric burner	NA	▪
Electrical resistors	▪	NA
Capacity 8 trays 400x600 mm	▪	▪
Capacity 10 trays 400x600 mm	▪	▪
Capacity 12 trays 400x600 mm	▪	▪
Rear access	▪	▪
Controls on the right-handle left	▪	▪
Opposite side controls/handle	□ €	□ €
Thermostat and digital timer	▪	▪
7" colour Touch Screen	□ €	□ €
Hood - Extractor:		
Motorized hood exhauster	▪	▪
Standard steam generator	▪	▪
Supply voltage		
400 V TRI + N 50 Hz	▪	▪
▪ Standard □ Option □ € Payment option NA Not available		

Option

- 7" Colour Touch Screen
- Electric leavening proofer in stainless steel
- Automatic steam in the proofer
- Open support stand in stainless steel
- Wheels kit
- Trolley Extraction kit
- Extra Trolley


Electromechanical Control Panel



EF-R E 8T	Rotating rack oven, non-removable for 8 baking pans 4060, electric, complete with Motor extractor hood	
EF-R G 8T	Rotating rack oven, non-removable for 8 baking pans 4060, gas/gasoil, complete with Motor extractor hood	7" Touch Screen Control Panel
EF-R E 10T	Rotating rack oven, non-removable for 10 baking pans 4060, electric, complete with Motor extractor hood	
EF-R G 10T	Rotating rack oven, non-removable for 10 baking pans 4060, gas/gasoil, complete with Motor extractor hood	
EF-R E 12 T	Rotating rack oven, non-removable for 12 baking pans 4060, electric, complete with Motor extractor hood	
EF-R G 12T	Rotating rack oven, non-removable for 12 baking pans 4060, gas/gasoil, complete with Motor extractor hood	



Technical features

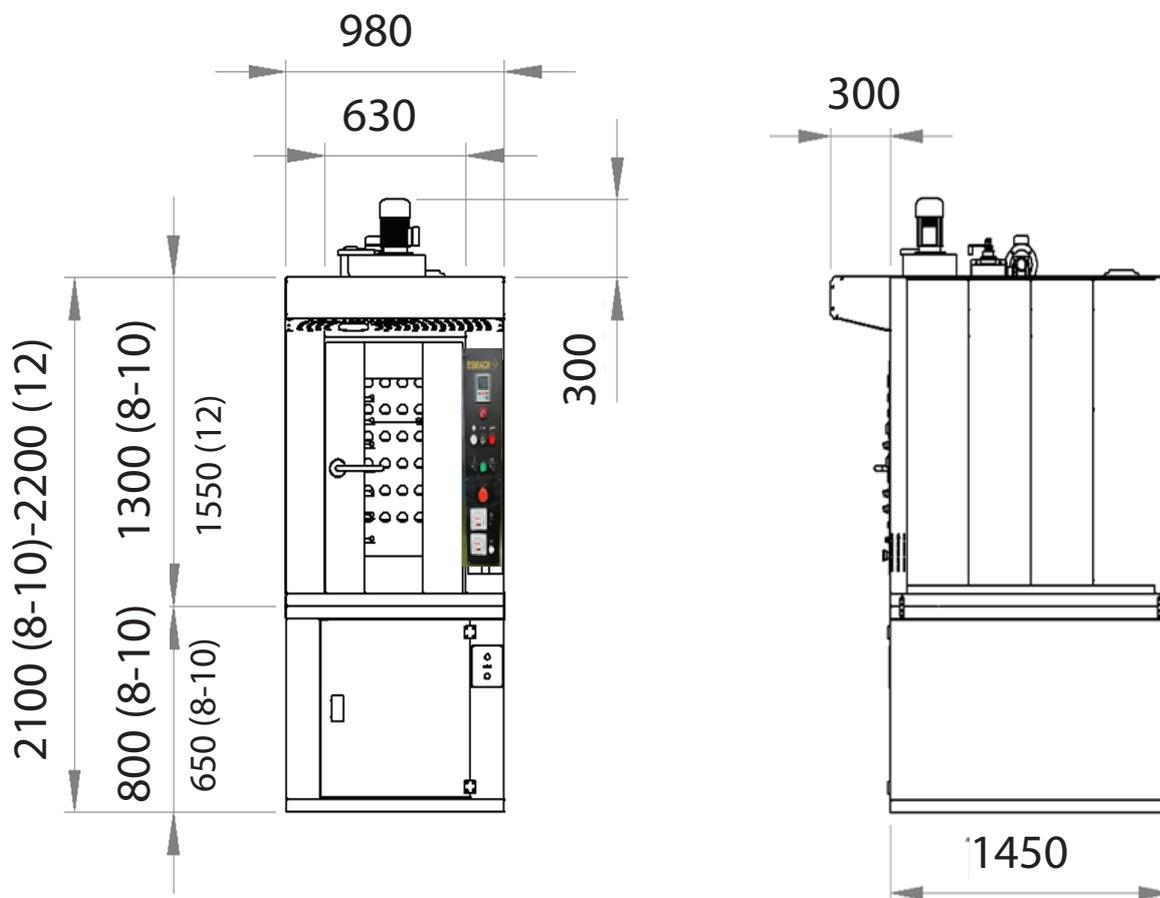

Model	Baking area m ²	Baking trays size cm	Baking trays No.	Pitch mm.	Power kW	Thermal power Kcal/h	Dimensions mm.	Mass kg
EF-R E 8T	1,92	60 X 40	8	134	15		980x1450x1300	460
EF-R E 10T	2,4	60 X 40	10	108	15		980x1450x1300	460
EF-R E 12T	2,88	60 X 40	12	90	16		980x1450x1550	500
EF-R G 8T	1,92	60 X 40	8	134	1,5	22.000	980x1450x1300	500
EF-R G 10T	2,4	60 X 40	10	108	1,5	22.000	980x1450x1300	500
EF-R G 12T	2,88	60 X 40	12	90	1,5	30.000	980x1450x1550	540
Leavening proofers		60 X 40	15/10		1,6		980x1450x800 (8-10)/650 (12)	100
Automatic Steam					1			
Open Support		60 X 40	15/10	-	-	-	980x1450x800 (8-10)/650 (12)	40
Wheel Kit							+130	1